


# DOCK CROSS MEMBER SUPPORT FOR PLAYSTAR STATIONARY DOCKS

## Components:

- (2) 5ft cross bars with 3/8" x 2" carriage bolts
- (4) Truss straps
- (1) 3/8" x 3" hex bolt




**Step 1:** Slide truss straps into place as shown below.

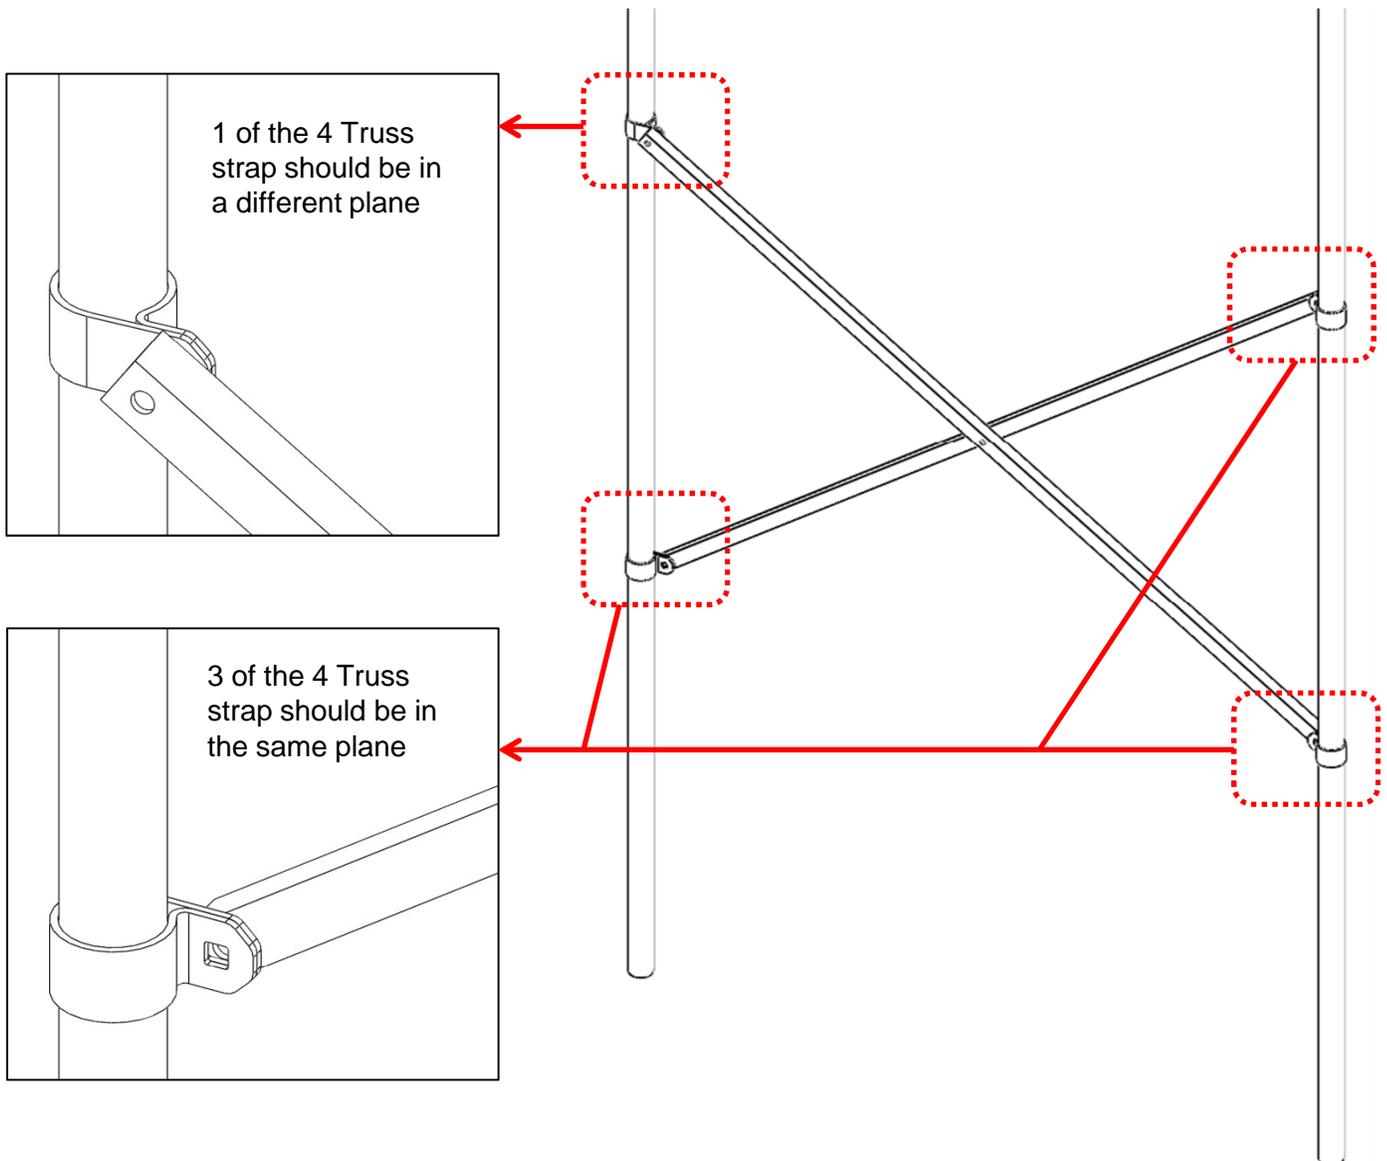

# DOCK CROSS MEMBER SUPPORT FOR PLAYSTAR STATIONARY DOCKS

**Step 2:** Attach the 5ft cross bars with 3/8" carriage bolts, 3/8" flat washers, 3/8" slit washers, and 3/8" nuts. The 5ft bars should always mate with the flat side of the truss straps as shown. The carriage bolts are inserted through the truss strap opposite the 5ft bars.

Do not tighten at this time.

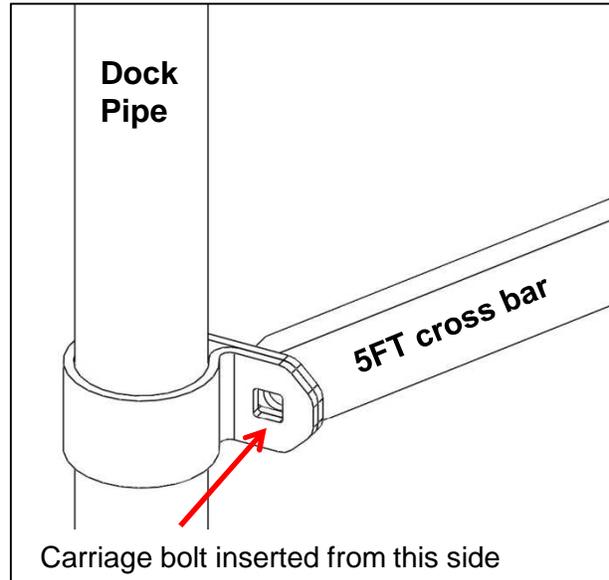

**Step 3:** Bolt the two cross bar together through the center hole with a 3/8" x 3" hex bolt.

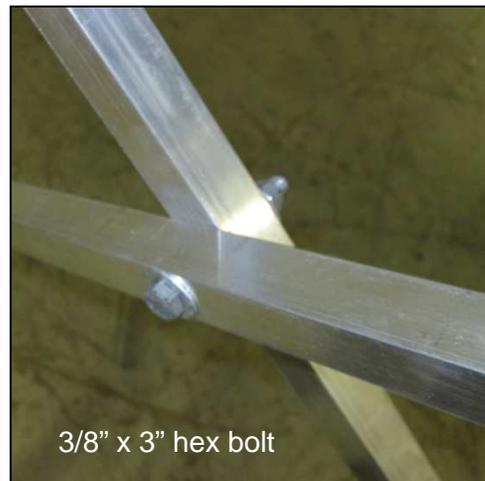


Fig 3

**Step 4:** Once all the bolts are in place, tighten the entire cross member support assembly.